




Classe H2 Bordo Ponte - Barriera PAB CE P 2 onde per manufatto W5 con corrimano

Class H2 Bridge side - 2-waves PAB CE P guardrail for bridge W5 with handrail

Aufhaltestufe H2 für Kunstbauten - 2-welliges PAB CE P Rückhaltesystem W5 mit Handgeländer

Classe H2 Bord pont - Glissière PAB CE P 2 crosses simple pour pont W5 avec rambarde

Clase H2 Borde de puente - Barrera PAB CE P de doble onda simple para base puente W5 con pasamanos

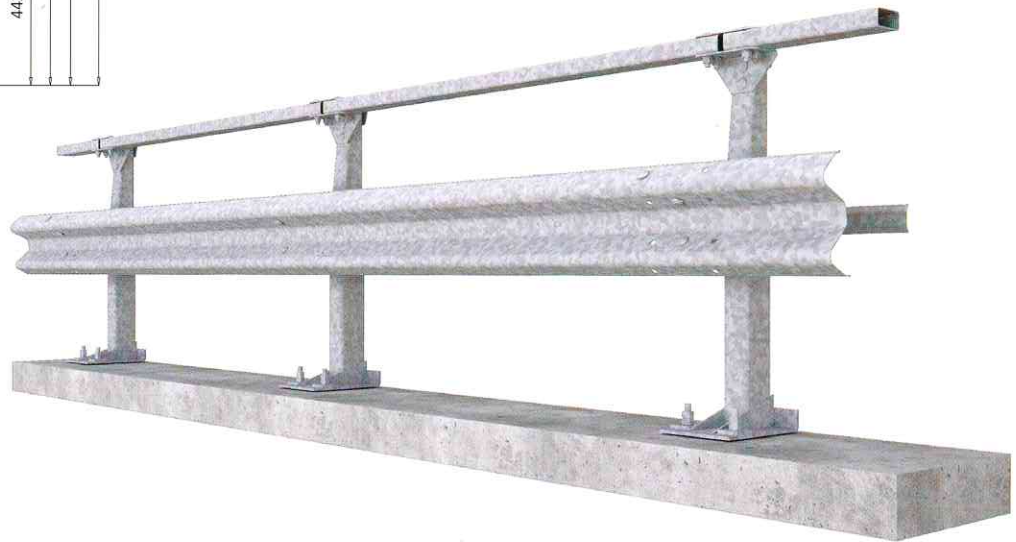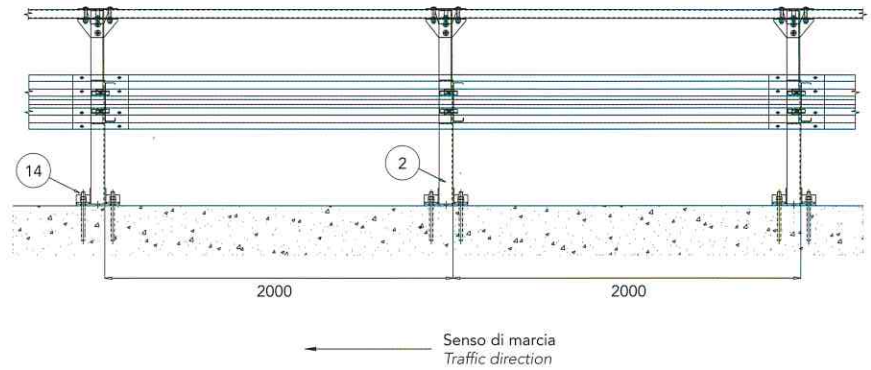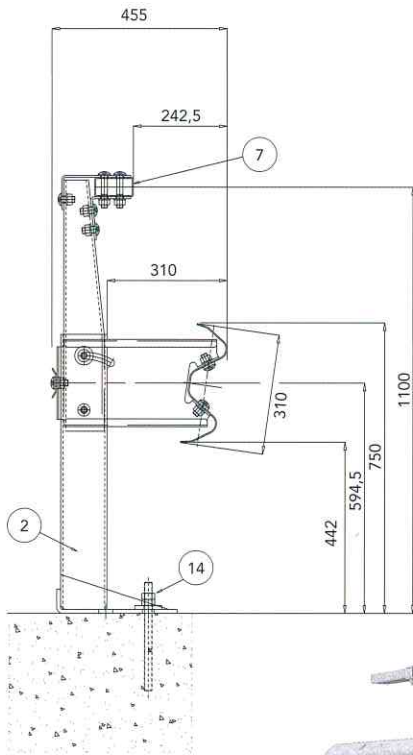

Caratteristiche Characteristics, Eigenschaften, Caractéristiques, Características

Altezza fuori terra Height above ground level, Höhe über Grundboden, Hauteur hors sol, Altura sobre el suelo	1100 mm
Profondità d'infissione Depth of penetration, Rammtiefe, Profondeur de piling du poteau, Longitud hincada	-
Ingombro trasversale Overall width, Gesamtbreite, Grosseur hors tout, Anchura total	455 mm
Interasse pali Post spacing, Steherabstand, Distance entre poteaux, Distancia entre postes	2000 mm

Rapporti di prova Crash test reports, Testberichte, Comptes rendus d'essais, Relaciones de pruebas

Test n.	Facility	Test	Type	Barrier length m	Mass kg	Speed km/h	ASI max 1.4	THIV max 33 km/h	D m	Vi m	W m
PAB/BPM004/1238	LIER	TB51	Laterale 20°	84	13.000	70	-	-	1,1	2	1,7=W5
PAB/BPM002/1236	LIER	TB11	Laterale 20°	84	900	100	1,1= B	27	0,3	-	0,8=W2

Prove d'urto Impact test report nn. PS007/13 e PS008/13